


The photograph may not match the reference exactly. Please read the product description to identify the finish.



TECHNICAL CHARACTERISTICS

Type:	Beacon
Adjustable:	Adjustable 355° on the horizontal axis.
IP Protection degrees:	IP54
IK Protection degrees:	IK04
Light source 1:	104 x LED 9W Warm White - 3000K 864 lm ^(N)
Total power consumption (W):	12.3W
Voltage / Frequency:	100-240V/50-60Hz
Warranty (Years):	2
Option to extend the guarantee (Years):	5
Units per box:	2
Net Weight (Kg):	0.635
EAN:	8435381412715
Stability:	>15°

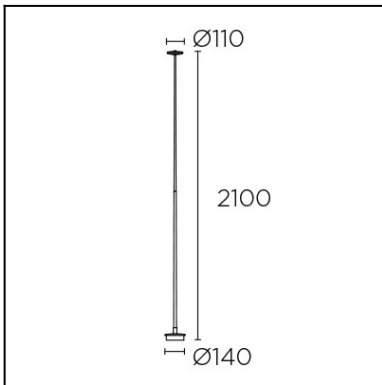


MATERIALS / FINISHES

Structure material:	High purity aluminium Fiber glass	Diffuser material:	Polycarbonate
Structure finish:	Black	Diffuser finish:	Opal

GEAR

Multi-voltage electronic gear included (100-240V / 50-60Hz)

Download photometric file .ldt / .ies

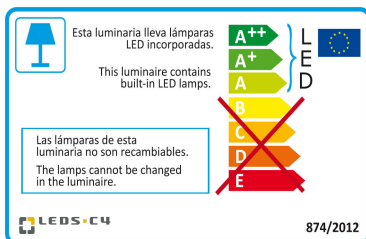

Click on image to download energy label

Lm^(N): Nominal flow of light in actual working conditions. Its actual flow will depend on the environmental conditions and the efficiency of the optics and/or diffuser.


LEDS-C4 reserves the right to make the necessary technical changes they deem adequate, in order to improve the features of the product.

Please consult the sales team to clarify any doubt.

Luminaire		Measur.		Lamp	
Code	25-9733-05-M1	Code	25-9733-05-M1	Code	25-9733-05-M1
Name	Pie INVISIBLE 9W warm white	Name	Pie INVISIBLE 9W warm white	Number	1
Line	Eulumdat	Date	16-09-2014	Position	
Efficiency	100.00%	Coordinate system	CG	Total Flux	469.49 lm
Maximum value	159.81 cd	Position	C=0.00 G=0.00	Double Symmetrical	
Round Luminaire	Diam.	110 mm	Height	20 mm	
Round Luminous Area	Diam.	105 mm	Height	10 mm	
Horizontal Luminous Area	0.008659 m2	Emitting area on Plane 180°	0.001050 m2		
Emitting area on Plane 0°	0.001050 m2	Emitting area on Plane 270°	0.001050 m2		
Emitting area on Plane 90°	0.001050 m2	Glare area at 76°	0.003114 m2		
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	469.49 lm		
Operator	Asselum T2	Source voltage			
Temperature	25.00 °C	Source current			
Humidity	60.00 %	Photocell			
Notes					


Luminaire Lamps					
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
Eulumdat	25-9733-05-M1	25-9733-05-M1 - 9.00 W	469.49	9.00	1
C.I.E.	46 78 94 98 100	D DIN 5040		A31	
F UTE	0.98 E + 0.02 T	B NBN		BZ 5	



Diam=110mm

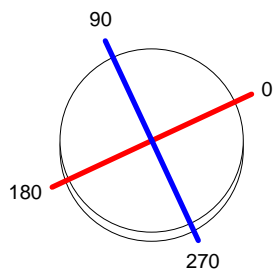

C Halfplanes
 180.0 — 0.0
 270.0 — 90.0

ULOR 2.18 %
 DLOR 97.82 %
 RN 2.18 %

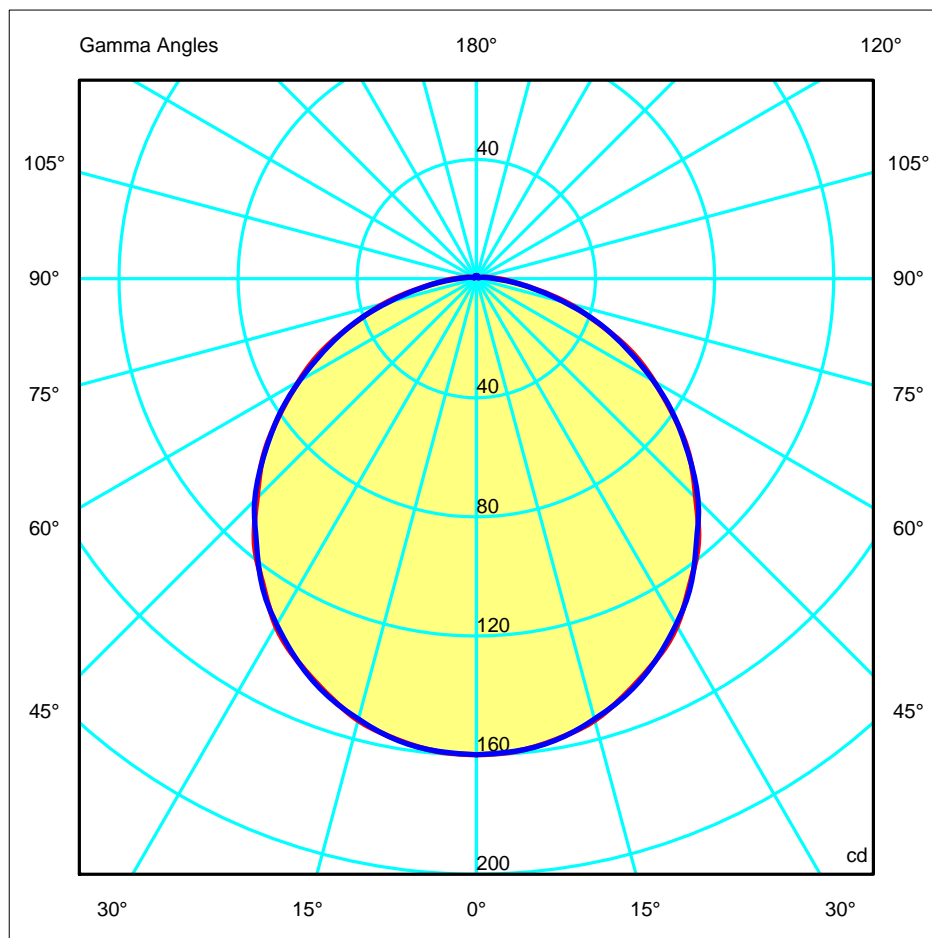

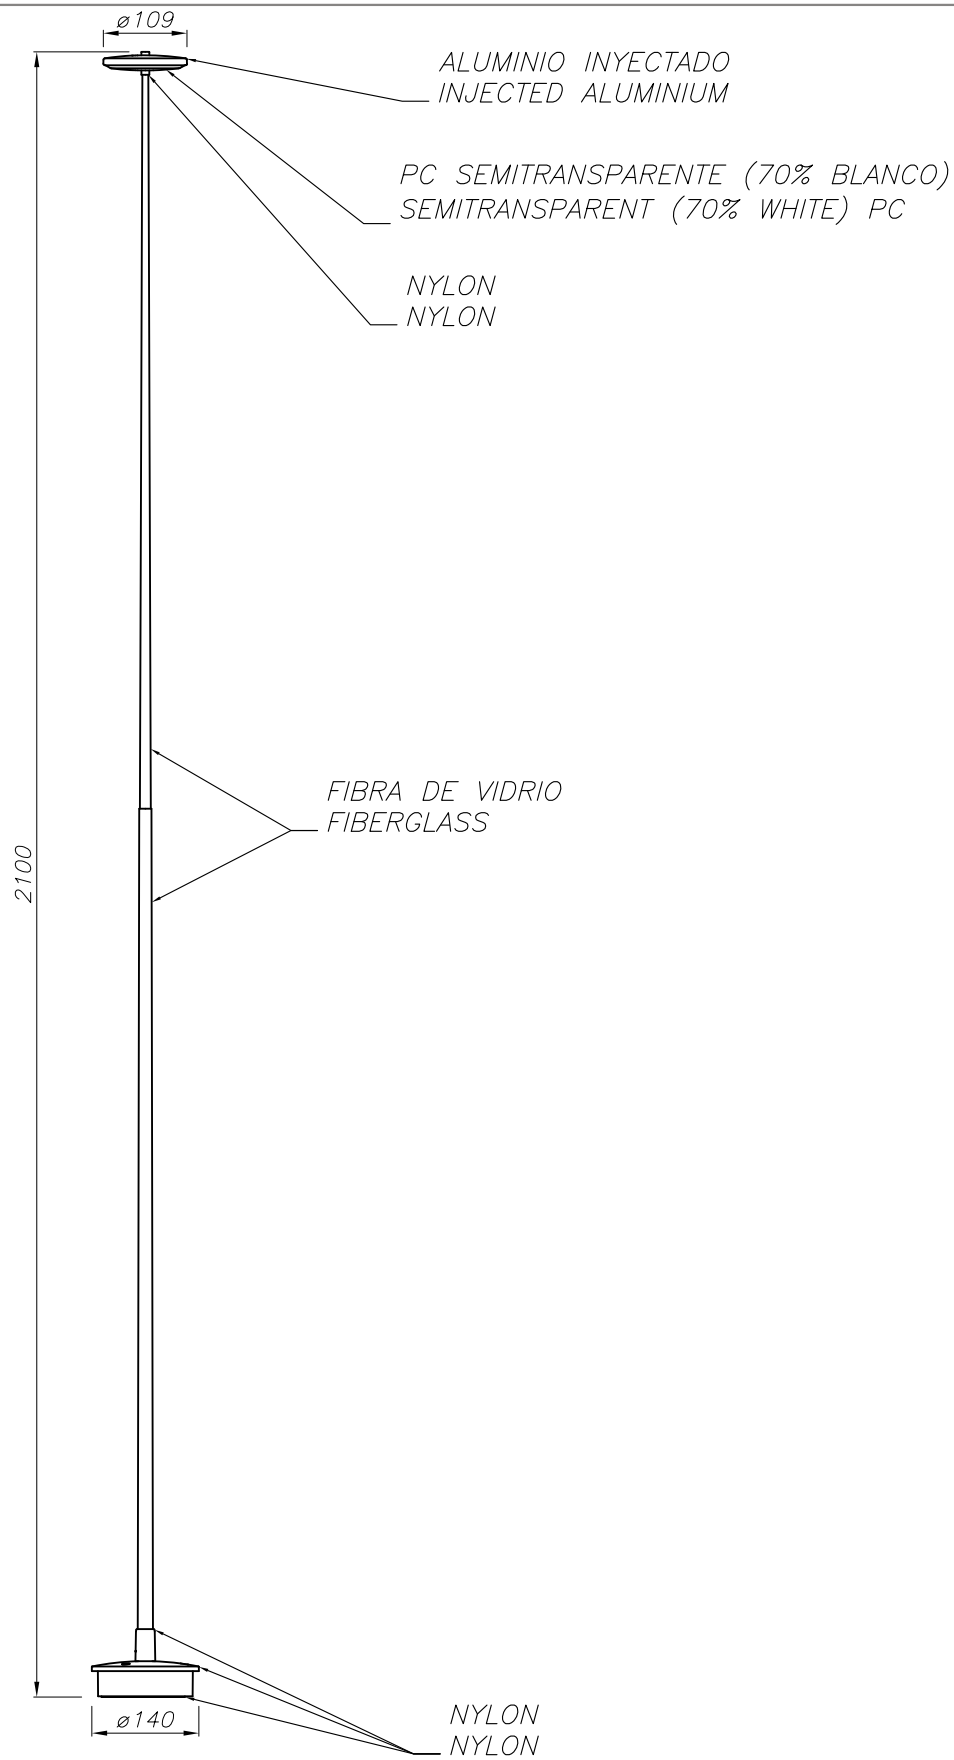

PLANTILLA DE INSTALACION
INSTALLATION TEMPLATE

