



Ohps_FL E27



Floor Lamp | 220-240 V | 1xE27
12381

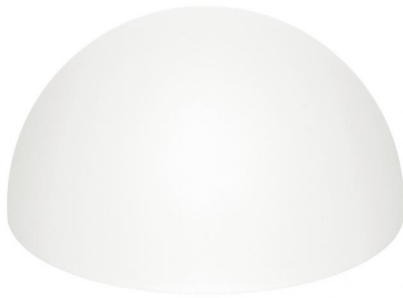

| Technical data | |
|--|------------------|
| Type | Floor Lamp |
| Installation position | Floor |
| Installation environment | Outdoor |
| Lamp cap | 1 x E27 Max 46W |
| Frequency | 50-60 Hz |
| Optics | General Lighting |
| Light emission direction | upward |
| Safety class | 2 |
| IP | IP20 |
| IK | IK10 |
| Glow wire test | 850° |
| Direct mounting on normally flammable surfaces | Yes |
| CE | Yes |
| Dimmable article | No |
| Directional | No |
| Tilting | No |
| Walk-over | No |
| Drive-over | No |
| Cable included | Yes |
| Cable length | 2 m |
| Electric socket | Type C |
| Resin potting | No |
| Net weight | 5.700 Kg |

| Finishing diffuser | |
|--------------------|---------|
| Material | PE |
| Colour | neutral |

| Finishing mounting frame | |
|--------------------------|-------|
| Material | PC |
| Colour | white |



Floor Lamp | 220-240 V | 1xE27
12381

Single emission floor lamp for outdoor application. Compatibility: LED lamp, halogen 46 W, compact fluo 20 W; lamp cap 1xE27.

The diffuser is made of pe; the mounting frame is made of PC, with a white finish. The ingress protection degree is IP20; the total weight is of 5.700 kg.

. The power supply cable is included and features a 2 m lenght.

The device features protection class II and can be floor-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features

| | |
|---|--------|
| Source lumens | 700 lm |
| Colour rendering index | 100 Ra |
| Junction temperature (lighting fixture) | 80 |
| Standard Operating Ambient Temperature | 25 |