




Floor Lamp | 220-240 V | topLED 8 W 350 mA
CRI 80
15384



Technical data	
Type	Floor Lamp
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	General Lighting
Light emission direction	upward
Power	8 W
Source lumens	1002 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
AC / DC	AC
Safety class	2
IP	IP65
IK	IK10
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Net weight	3.300 Kg

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	PE
Colour	white

Floor Lamp | 220-240 V | topLED 8 W 350 mA | CRI 80
15384

Single emission floor lamp for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1002 lm, with a 125.3 lm/W nominal luminous efficacy.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 3.300 kg.

The total absorbed power is 8 W.


The device features protection class II and can be floor-mounted with an outer casing, code 14930(for concrete or masonry).

Compliant with the EN 60598-1 standard and its specific provisions.

Illuminotechnical Features	
Light Output Ratio (LOR)	84 %
Source lumens	1002 lm
Delivered lumens	847 lm
Consumption	8 W
Luminaire efficacy	105 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25


UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 16
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	178°

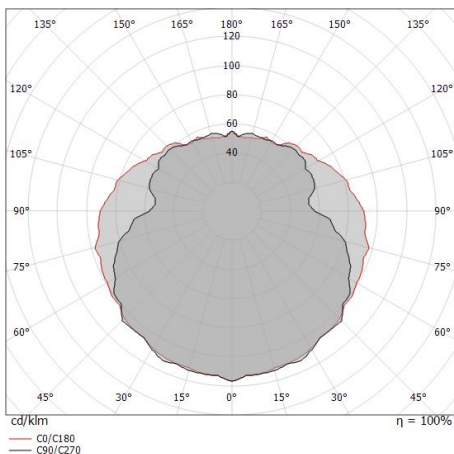




Ohps_FL | Floor Lamp | Accessories
15384




Outer casing - outer casing for installation on ground or on concrete

Code
14930



Pegs
installation position: land,Cover material: pc

Code
14931



anti-theft - anti-theft ground fixing bracket

Code
14100