


Straight_P1



Pendant Luminaires | 220-240 V
100 topLED 9.5 W DC - 11 W AC | CRI 90
8505

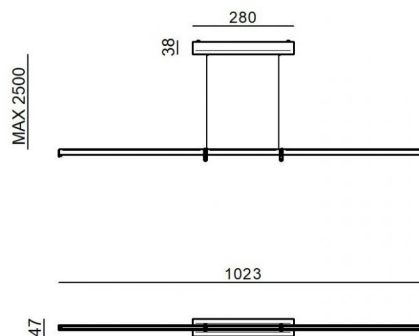

Technical data	
Construction year	2020
Type	Surface
Installation position	Ceiling
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Light emission direction	downward
Power	9.5 W
Source lumens	1519 lm
Frequency	60 - 50 Hz
CCT / Tone	2700 K
Colour rendering index	90 Ra
C.C. / C.V.	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	Driver
Dimmable article	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	2.5 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.900 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Aluminium
Colour	chrome
Processing	Electroplating
Finishing diffuser	
Material	PC
Colour	opaline
Finishing mounting frame	
Material	Iron
Colour	chrome
Processing	Electroplating

Straight_P1



Pendant Luminaires | 220-240 V | 100 topLED 9.5 W DC - 11 W AC | CRI 90 | Base 8505


Single emission pendant luminaires for indoor application. The warm white LED light source with a general lighting light distribution is composed of 100 topLEDs with CCT of 2700 K and a CRI 90; the source luminous flux is 1519 lm, with a 159.9 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a chrome finish, processed by means of electroplating; the diffuser is made of PC; the mounting frame is made of iron, with a chrome finish, processed by means of electroplating. The ingress protection degree is IP20; the total weight is of 0.900 kg.

The total absorbed power is 9.5 W. The power supply cable is included and features a 2.5 m length.

The device features protection class I and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

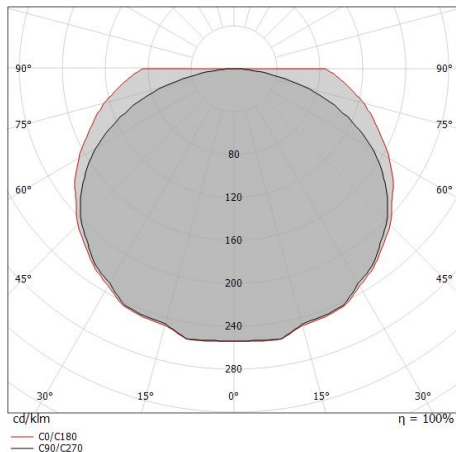

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	2.09 3.51	E(0°) 560 E(C90) 23 E(C0) 6
1.0	4.17 7.02	E(0°) 140 E(C90) 6 E(C0) 1
1.5	6.26 10.53	E(0°) 62 E(C90) 3 E(C0) 1
2.0	8.35 14.04	E(0°) 35 E(C90) 1 E(C0) 0
2.5	10.44 17.55	E(0°) 22 E(C90) 1 E(C0) 0
3.0	12.52 21.06	E(0°) 16 E(C90) 1 E(C0) 0

— C0/C180 (Half-peak divergence: 148.2°)
— C90/C270 (Half-peak divergence: 128.8°)

Illuminotechnical Features

Light Output Ratio (LOR)	36 %
Source lumens	1519 lm
Delivered lumens	552 lm
Consumption	11 W
Luminaire efficacy	50 lm/W
Colour temperature	2700 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	90 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

LED Life / Failure Ratio

L80 B20 C0 80000h

UGR

UGR axial	27.5
UGR transversal	30.3
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20

OPTICAL

Light distribution simmetry	Symmetrical 2
C0/C180 optics	148°
C90/C270 optics	129°